

Linear actuator DSZY1Q-POT (Potentiometer)

The electric linear actuators of the DSZY1Q series are especially characterized by their smooth running and low noise level. They are available in three models:

1. DSZY1Q-STD
(standard for all applications without position feedback)
2. **DSZY1Q-POT**
(with potentiometer for absolute position feedback)
3. DSZY1Q-HS2
(with 2-channel Hall sensor for incremental position feedback)

Equipped with a trapezoidal screw spindle (ACME screw), these are small, compact and lightweight DC linear drives. By means of an integrated diode circuit, the direction is reversed quickly by simple voltage reversal of the DC motor. As a standard, all DSZY1Q types have two integrated, non-adjustable limit switches directly connected to the DC motor. Overloading of the drive can be prevented by separate monitoring and limiting of the current.




Type code (all options can be combined)

DSZY1Q - 12 - 10 - 200 - POT - IP65						Optional	
Type	Input voltage	Gear reduction i	Stroke	Model	IP Code	C	
	12 Vdc	20	25 mm	Potentiometer		1	1
	24 Vdc	30	50 mm				
			100 mm				
			150 mm				
			200 mm				
			250 mm				
			300 mm				
						1 = standard	1 = standard
						3 = spherical rod eye	3 = rotated 90°
						6 = plastic slot	

Performance data: Load – Speed – Current

Gear reduction i	Dynamic Load (N)	Static load (N)	Typical speed * (mm/s)		Typical current * (A)			
			minimum load	maximum load	minimum load		maximum load	
					12 Vdc	24 Vdc	12 Vdc	24 Vdc
20	500	2,500	5.8	3.9	0.2	0.1	1.0	0.5
30	800	2,500	3.8	2.6	0.2	0.1	1.2	0.6

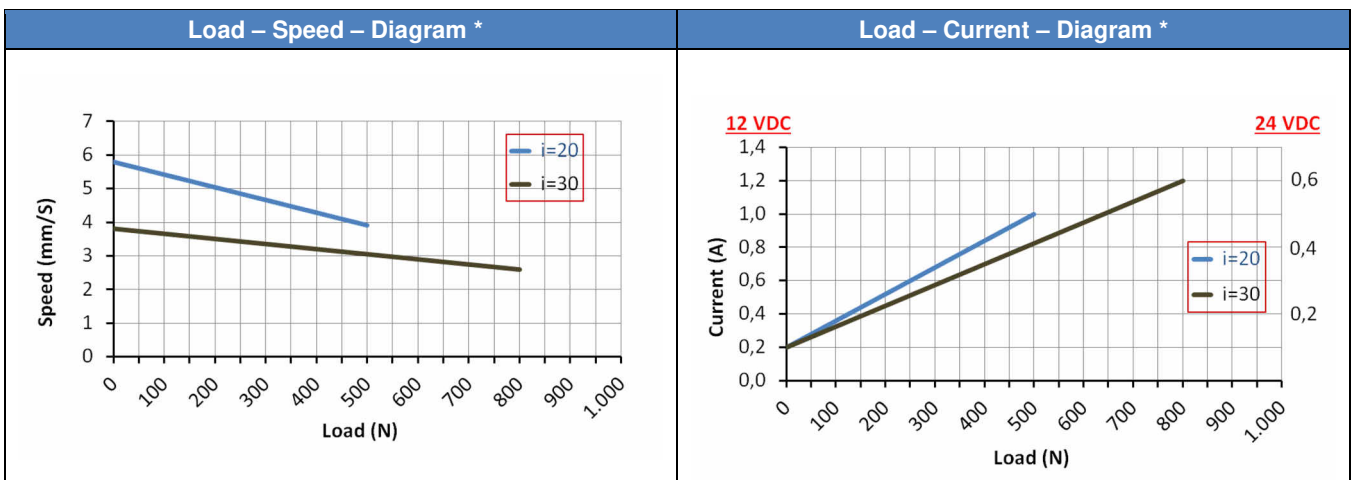



(*) Average values

Additional technical specifications

- Operating voltage 12 Vdc and 24 Vdc
- Thrust and tensile load up to 800 N
- Static load 2,500 N
- Noise level: ≤ 55 dB
- Duty cycle 25 % (e.g., 1 min continuous operation – 3 min pause)
- Zinc alloy casing
- Aluminum outer tube and push rod
- Working temperature -25 °C – 65 °C
- IP Code IP65 for all models (in idle state)
- Piston rod secured against rotation – see installation instructions
- CE - EMV 2014/30/EU (EN 55014-1:2006+A1:2009+A2:2011 EN 55014-2:1997+A1:2001+A2+:2008 Category I)

Dimensions

Front connector	Dimensions (length) in mm							
	Stroke (S) ± 3 mm	25	50	100	150	200	250	300
C1.. (Standard)	(A) retracted	165	195	246	297	348	399	450
	(A+S) extended	190	245	346	447	548	649	750
C3..	(A) retracted	206	236	287	338	389	440	491
	(A+S) extended	231	286	387	488	589	690	791
C6..	(A) retracted	178.5	205.5	256.5	307.5	358.5	409.5	460.5
	(A+S) extended	203.5	255.5	356.5	457.5	558.5	659.5	760.5

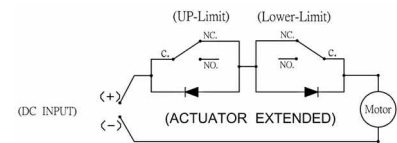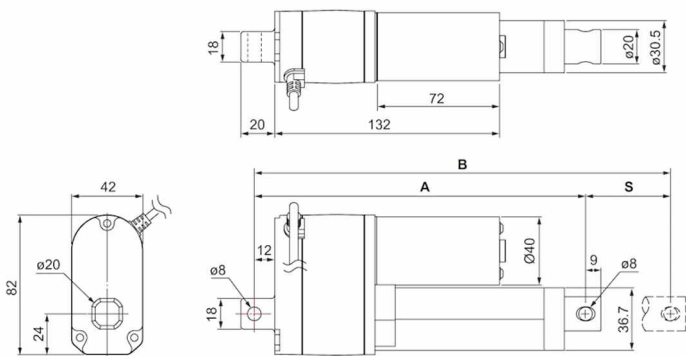

Red wire on “+” and black wire on “-”:
Actuator extends.

Black wire on “+” and red wire on “-”:
Actuator retracts.

Cable length: 900 mm

Bore tolerances: 8 mm $+0,2\text{ mm}$
 -0 mm

Weight

Stroke in mm	25	50	100	150	200	250	300
Weight in kg	1.080	1.120	1.180	1.260	1.330	1.380	1.470

Potentiometer

Power		Potentiometer			
Red	Black	White	Yellow	Blue	
M+	M-	GND	Vcc	Data	

Stroke (mm)	25	50	100	150	200	250	300
Resistor value (kOhm)	0.3-9.9	0.3-9.3	0.3-9.7	0.3-8.6	0.3-9.6	0.3-9.3	0.3-9.3

Voltage input range: Vcc to 70 Vdc - Output voltage of signal: Data = Vcc - Total resistance tolerance: ± 5 %
The resistor increases during extension and decreases during retraction.

Front and rear connector

Front connector (piston rod)		
1 = standard (metal)	3 = spherical rod eye	6 = plastic slot
D=8 mm - H=15 mm - W=6 mm		





Rear connector (gear cover)	
1 = Standard	3 = 90° rotated
D=8 mm	

CAUTION:

C11 is standard and will not be specified in the type code.

If at least one connector is changed, option C must be attached to the type code (e.g., DSZY1...-IP65-C63)

Mounting material

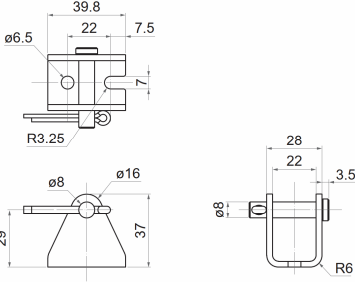Mounting clamp DSZY1-H01	Mounting bracket DSZY1-H02
	
	

Installation instructions

It must be ensured that the load is not greater than shown in the diagram. To protect against overload, the voltage must be switched off when the maximum rated current is reached. This can be read in the load-current diagram depending on the selected reduction ratio. Please note the correct supply voltage, which is indicated on the electric linear actuator.


The piston rod extends when the red wire is connected to positive and the black wire to negative. For the retraction of the piston rod, positive must be reversed with negative. The movement always stops automatically when the built-in limit switches are reached or when the voltage is interrupted. The limit switches cannot be changed by the customer.

The load must always be centered in the direction of movement. Transverse forces must be avoided. They shorten the service life and can impede the function or lead to irreparable damage in extreme cases.

The piston rod tube is screwed onto the spindle nut via a thread. It is therefore possible, if necessary, to rotate the piston rod and thus the fastening eye by max. 180° into the desired position.

If no rotational forces act on the piston rod, the latter retains its orientation and does not rotate.

CAUTION: The limit switches have no on/off function for the linear actuator. Therefore, the voltage must be immediately disconnected after the limit switches have been triggered, or the piston must be moved out of the end position in a timely manner.

 <p>MSW Motion Control GmbH</p>	<p>Drive System Europe by MSW® A trade mark of MSW Motion Control GmbH</p>	
	<p>MSW Motion Control GmbH Vertriebsgesellschaft Schloßstr. 32/34, 33824 Werther (Westf.) Germany</p>	<p>anfrage@msw-motion.de www.msw-motion.de Phone: +49 (0)5203 919200</p>